


Genie Genie Lift Specifications

Material Lift

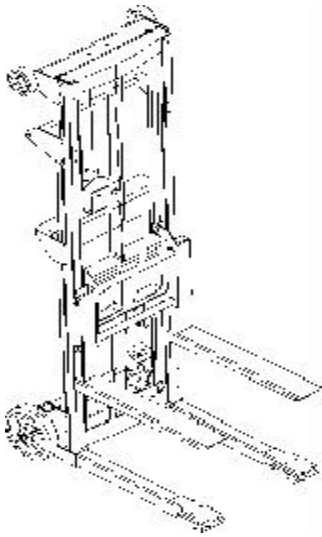

STANDARD FEATURES

- High load capacity steel forks
- Hold-down mechanism secures carriage during transport
- GL-4, GL-8, and GL-10 designed to roll through standard 32-inch (81 cm) doorway
- Reversible winch handle for easy storage
- Winch operates while ladder option is in use or stowed

SPECIFICATIONS

MODEL	GL-4		GL-8	
	US	Metric	US	Metric
Height				
Height stowed ^{1,2,3}	5 ft 7 ½ in	1.72 m	5 ft 7 ½ in	1.72 m
Height max forks up	5 ft 11 in	1.8 m	10 ft ½ in	3.06 m
Height max forks down	4 ft 1 ½ in	1.26 m	8 ft 3 in	2.51 m
Height min forks down	3 ½ in	9 cm	3 ½ in	9 cm
Length				
Standard Base - stowed	12 in	30 cm	12 in	30 cm
Standard Base - operating	34 ¾ in	88 cm	34 ¾ in	88 cm
Straddle Base - stowed	19 ¼ in	49 cm	19 ¼ in	49 cm
Straddle Base - operating	43 in	1.09 m	43 in	1.09 m
Counterweight Base - operating	28 ½ in	72 cm	28 ½ in	72 cm
Width				
Standard Base ⁴	24 ¾ in	63 cm	24 ¾ in	63 cm
Straddle Base - stowed ⁴	28 ¾ in	73 cm	28 ¾ in	73 cm
Straddle Base - max ⁴	43 ½ in	1.1 m	43 ½ in	1.1 m
Straddle Base max inside	36 in	91 cm	36 in	91 cm
Counterweight Base - stowed ⁴	28 ¾ in	73 cm	28 ¾ in	73 cm
Counterweight Base - max ⁴	43 ½ in	1.1 m	43 ½ in	1.1 m
Counterweight Base max inside	36 in	91 cm	36 in	91 cm
Weight/Standard Caster Options				
Standard Base	113 lb	51 kg	132 lb	60 kg
Straddle Base	126 lb	57 kg	145 lb	66 kg
Counterweight Base	392 lb	178 kg	411 lb	186 kg
Weight/Pneumatic Caster Options				
Standard Base	117 lb	53 kg	136 lb	62 kg
Straddle Base	130 lb	59 kg	149 lb	68 kg
Weight/4 Point Caster Option				
Straddle Base caster option A	137 lb	62 kg	156 lb	71 kg
Straddle Base caster option B	139 lb	63 kg	158 lb	72 kg
Miscellaneous				
Load height min	3 ½ in	9 cm	3 ½ in	9 cm
Ground clearance ^{1,2,3}	¾ in	2 cm	¾ in	2 cm
Load capacity	500 lb	227 kg	400 lb	181 kg
at 12 in (30 cm) load center				
Average cranks - standard winch	11 ½/ft	38/m	11 ½/ft	38/m
Average lift - electric winch	2 in/sec	5 cm/sec	2 in/sec	5 cm/sec
Fork length	22 ½ in	57 cm	22 ½ in	57 cm
Fork width	20 ½ in	52 cm	20 ½ in	52 cm
Load platform length	23 in	58 cm	23 in	58 cm
Load platform width	22 in	56 cm	22 in	56 cm

¹The 10 in pneumatic rear wheel option will add 1 in (2.5 cm) to these specifications

²The counterweight base will add 1 in (2.5 cm) to these specifications

³The 4 point caster option B will add 1 in (2.5 cm) to these specifications

⁴Outside dimensions

Genie Industries


USA 18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone (425) 881-1800
Toll Free USA/Canada 800-536-1800
Fax (425) 883-3475
<http://www.genielift.com>

UK The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
Telephone (44) 01476-584333
Fax (44) 01476-584334
<http://www.genielift.com>

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Lift Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Lift, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "Genie Lift" is a Trademark of Genie Industries. 5/13/02

Genie Genie Lift Specifications

Material Lift, continued.

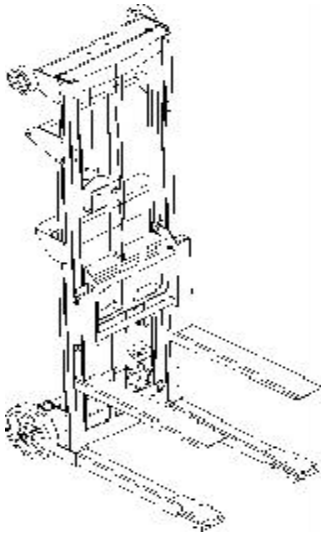

SPECIFICATIONS

MODEL	GL-10		GL-12	
Height	<i>US</i>	<i>Metric</i>	<i>US</i>	<i>Metric</i>
Height - stowed ^{1,2,3}	6 ft 5 1/2 in	1.97 m	7 ft 6 3/4 in	2.31 m
Height max forks up	11 ft 8 in	3.56 m	13 ft 9 1/2 in	4.2 m
Height max forks down	9 ft 10 1/2 in	3.01 m	12 ft	3.66 m
Height min forks down	2 in	5 cm	2 in	5 cm
Length				
Straddle Base - stowed	19 1/4 in	49 cm	19 1/4 in	49 cm
Straddle Base - operating	43 in	1.09 m	43 in	1.09 m
Counterweight Base - operating	28 1/2 in	72 cm	n/a	n/a
Width				
Straddle Base - stowed ⁴	28 3/4 in	73 cm	28 3/4 in	73 cm
Straddle Base - max ⁴	43 1/2 in	1.1 m	43 1/2 in	1.1 m
Straddle Base - max inside	36 in	91 cm	36 in	91 cm
Counterweight Base - stowed ⁴	28 3/4 in	73 cm	n/a	n/a
Counterweight Base - max ⁴	43 1/2 in	1.1 m	n/a	n/a
Counterweight Base - max inside	36 in	91 cm	36 in	91 cm
Weight/Standard Caster Options				
Straddle Base	149 lb	68 kg	154 lb	70 kg
Counterweight	415 lb	188 kg	n/a	n/a
Weight/Pneumatic Caster Options				
Straddle Base	153 lb	69 kg	158 lb	72 kg
Weight/4 Point Caster Option				
Straddle Base caster option A	160 lb	73 kg	165 lb	75 kg
Straddle Base caster option B	162 lb	73 kg	167 lb	76 kg
Miscellaneous				
Load height min	3 1/2 in	9 cm	3 1/2 in	9 cm
Ground clearance ^{1,2,3}	3/4 in	2 cm	3/4 in	2 cm
Lift capacity at 12 in (30 cm) load center	350 lb	159 kg	350 lb	159 kg
Average cranks - standard winch	11 1/2/ft	38/m	11 1/2/ft	38/sec
Average lift - electric winch	2 in/sec	5 cm/sec	2 in/sec	5 cm/sec
Fork length	22 1/2 in	57 cm	22 1/2 in	57 cm
Fork width	20 1/2 in	52 cm	20 1/2 in	52 cm
Load platform length	23 in	58 cm	23 in	58 cm
Load platform width	22 in	56 cm	22 in	56 cm

STANDARD FEATURES

- High load capacity steel forks
- Hold-down mechanism secures carriage during transport
- GL-4, GL-8, and GL-10 designed to roll through standard 32-inch (81 cm) doorway
- Reversible winch handle for easy storage
- Winch operates while ladder option is in use or stowed

¹The 10 in pneumatic rear wheel option will add 1 in (2.5 cm) to these specifications

²The counterweight base will add 1 in (2.5 cm) to these specifications

³The 4 point caster option B will add 1 in (2.5 cm) to these specifications

⁴Outside dimensions

Genie Industries

USA 18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone (425) 881-1800
Toll Free USA/Canada 800-536-1800
Fax (425) 883-3475
<http://www.genielift.com>

UK The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
Telephone (44) 01476-584333
Fax (44) 01476-584334
<http://www.genielift.com>

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Lift Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Lift, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "Genie Lift" is a Trademark of Genie Industries. 5/13/02